



▶ Zerust® Axxatec™ 8110C Additive


Zerust®/Excor® Axxatec™ 8110C is an easy-to-use corrosion inhibiting aqueous-based additive for the protection of enclosed systems. Use to protect the water-filled void spaces of hydraulic and coolant equipment such as heat exchangers, industrial plate-chillers, and fire sprinkler systems for up to one year.

Zerust® Axxatec™ 8110C protects interior surfaces and parts comprised of iron, steel, aluminum, copper and brass within closed systems. Axxatec 8110C is water-based and easily diluted in glycolic coolants or water-based fluids. Use Zerust® Axxatec™ 8110C to prevent corrosion in closed systems for up to one year.

In addition, Axxatec™ 8110C will provide a few hours of corrosion protection when used as a coating or final rinse for parts that will be enclosed in Zerust®/Excor® VCI Packaging Film. Axxatec™ 8110C helps prevent flash rust in-between production processes, but is not recommended as a long-term or stand-alone external corrosion protection coating. Check with your Zerust®/Excor® representative for a corrosion management system most effective for your metal assets.

Application Example

Fire extinguishing water systems can be protected by Axxatec™ 8110C during downtime.

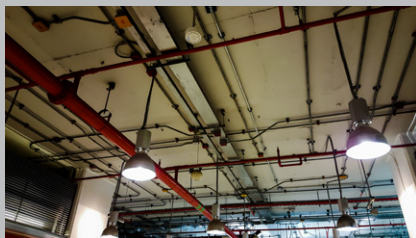

▶ Benefits

- Proven corrosion protection
- Protects multiple metal types
- Water-based concentrate
- Non-hazardous*

Application Type

- Storage
- Work in progress

*Non-Hazardous Disposal: Product in unopened original container prior to use is non-hazardous waste in the United States according to 40 CFR 261 (no components listed on F, K, P or U lists; not ignitable, not corrosive, not reactive and not toxic).



Specifications

Product Information	Zerust®/Excor® Axxatec™ 8110C is a water-based additive.	
Properties	Appearance	Light-yellow liquid
	Removability	Flush with deionized water
	pH	Approx. 6.8 - 7.8
Protection Info	Closed system	Up to 1 year
	Metal types	Ferrous, aluminum, copper and brass
Storage	Store in a cool (50 to 90°F / 10 to 32°C), dry place and away from sunlight in original packaging for up to 2 years from the date of shipment.	
Disposal	Dispose of in accordance with local, national and international regulations.	
Dilution	1 part Axxatec 8110C to 10 parts water. Pre-blend before adding to the system or may be added directly to the system.	

Availability

Zerust® Axxatec™ 8110C is sold as a concentrate. Large volume quantities and pricing available upon request.

Part Number	Quantity
350-M-00005PL	5 Gal pail
350-M-00005DR	55 Gal drum

Health and Safety

Non-Hazardous Disposal: Product in unopened original container prior to use is non-hazardous waste in the United States according to 40 CFR 261 (no components listed on F, K, P or U lists; not ignitable, not corrosive, not reactive and not toxic).

DECLARATION

This Data sheet and information it contains is considered to be accurate at the date of printing. No representation or warranty, expressed or implied is made as to the accuracy or completeness of the data and information contained in this publication. It is the User's obligation to evaluate and use products safely and within the scope advised in the data sheet and to comply with all applicable laws and regulations.

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on validations and tests conducted by Northern Technologies International Corporation/Zerust® or its partners and are believed to be reliable, but the accuracy or completeness thereof is not guaranteed. We warrant our products will be free from defects when shipped to customer. Our obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Northern Technologies International Corporation/Zerust® or its partners or agent of the claimed defect within 3 months after shipment of product to customer. Customer shall pay all freight charges for replacement products. We shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products. And any financial claims shall be limited to the value of the products sold.

Before using, user shall determine the suitability of the product for its intended use, and user assumes all risk and liability whatsoever in connection therewith. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of the company. The foregoing warranty is exclusive and in lieu of all other warranties, express, implied or statutory, including without limitation any implied warranty of merchantability or of fitness for a particular purpose. In no case shall Northern Technologies International Corporation/Zerust® be liable for incidental or consequential damages.

For full warranty and disclaimer information visit, www.zerust.com/warranty.

©2013-2021 Northern Technologies International Corporation (NTIC). All Rights Reserved. NTIC is the owner of the following trademarks: ActivPak®, Cor Tab®, EXCOR®, Flange Saver®, ICT®, NTI®, Plastabs®, Z-CIS®, Zerion®, ZERUST® 洁乐特 and the Color "Yellow". ABRIGO®, UNICO®, and VALENO® are registered trademarks of EXCOR GmbH, a Joint Venture Partner of NTIC.

A product of:
Northern Technologies
International Corp
4201 Woodland Road
Circle Pines, MN 55014
USA

Phone. +1 763.225.6600
Fax. +1 763.225.6645
sales@zerust.com
www.zerust.com

