


Technical datasheet

OTW.Power pack Uptower

OTW ID.: 7000-173

Introduction

The OTG power pack provides extra power for the gear oil changing process on wind turbines.
The unit media is gear oil at 320cSt at 40°C,
max. viscosity is 800cSt.

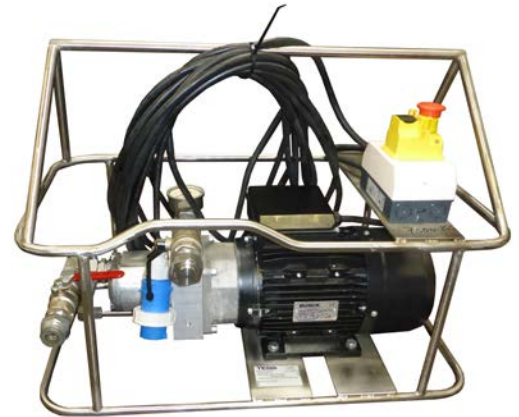

Features

- Suitable for fluid bunkering
- Valves inlet/outlet

Safety features

- Pressure safety valve
- Pressure gauge for monitoring
- Shock absorbing framework
- Start/stop operation
- Drip tray

Capacity & performance

Max Pressure	100 Bar
Max Flow	33,2 l/min
In/out connection	1" ISO-B Couplings.
El-motor power maximum viscosity	230V. 7,5kW, 16A
Max viscosity	800 cSt.

Weight & dimensions

Length	700 mm
Width	400 mm
Height	500 mm
Gross Weight	35 kg